


Feterl



GRAIN CLEANERS Model 85 & 100

UP TO 3200 BPH!

Designed to remove weed seeds, chaff, broken kernels, fines and foreign particles from your grain

With its non-perforated tube, the Feterl Grain Cleaner does not produce fines, it just takes out what is already there. The GENTLE ACTION of the flighting moves the grain through the rotating drum providing a continuous turning effect to assure that all grain is exposed to the screen where dockage is removed.

If you GROW or HANDLE grain, the FETERL ROTARY SCREEN will add PROFIT to your enterprise.

If you use artificial drying methods, you know that fines and broken kernels interfere with airflow. Reduce drying time and drying costs by drying only clean grain.

MODEL 100 ROTARY SCREEN GRAIN CLEANER


Compact - Convenient - Durable - Versatile

The MODEL 100 ROTARY SCREEN GRAIN CLEANER is recommended for use with 10" augers. Cleans 3,000 to 3,200 BPH for dry corn and beans. Capacity for small grain will be less, and significantly less in small grain with a high percentage of dockage. It has 7,838 square inches of screen area and exposes 368,350 square inches per minute when run at recommended speeds. The overall length is 16 ft. Removable tow hitch.

- **Electric**
Requires 5 HP electric motor
- **Hydraulic**
Flow Control required




Equipped with roller chain drum drive. May be powered with 5 HP electric motor or hydraulic drive. TAPERED FLIGHTING coupled with a LOW PROFILE HOPPER (Patent No. 4,036,411) ideally suited for gravity flow boxes, discharge of dryers and bin unloading augers.

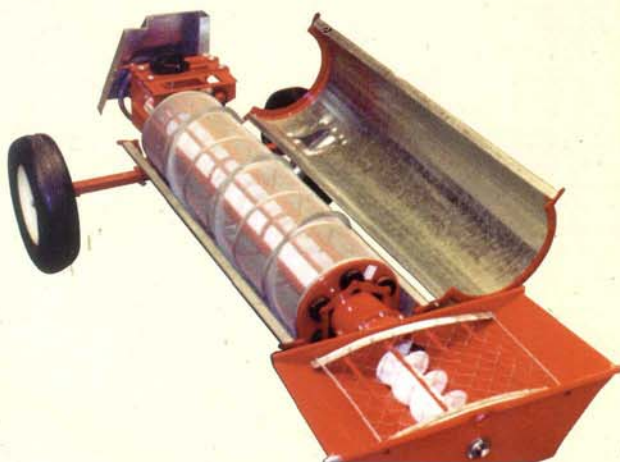

FINES COLLECTOR

Optional for Model 85 & 100 Grain Cleaners
Collects fines material and discharges it through the hole on the bottom of the fines collector near the discharge end.
(Shown in an open position - MUST BE CLOSED when operating).


Feterl

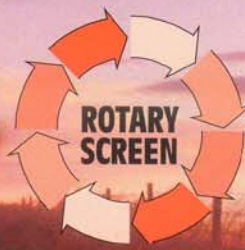

GRAIN CLEANERS Model 85 & 100

UP TO 3200 BPH!

MODEL 85 ROTARY SCREEN GRAIN CLEANER

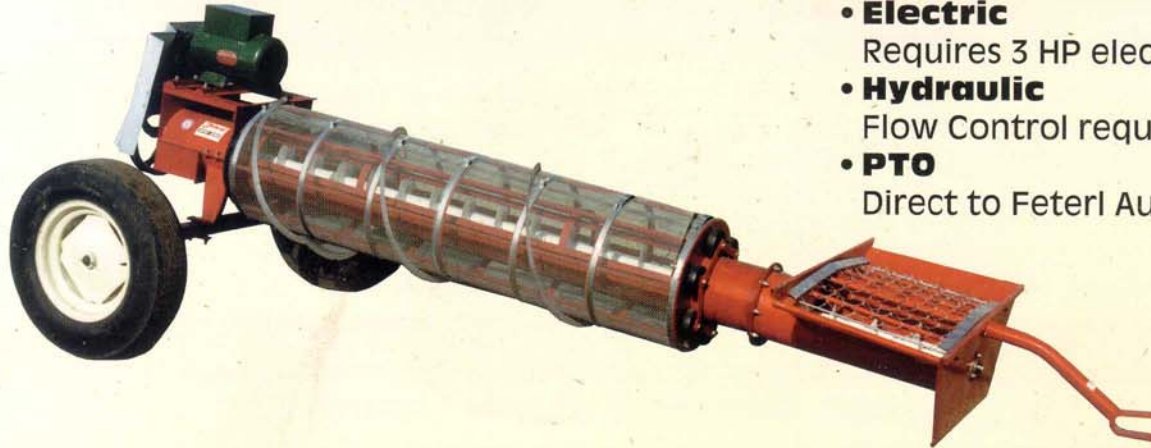

- **Electric**
Requires 3 HP electric motor
- **Hydraulic**
Flow Control required
- **PTO**
Direct to Feterl Auger PTO

The MODEL 85 ROTARY SCREEN GRAIN CLEANER is recommended for use with 8" augers. Cleans 1,800 to 2,300 BPH for dry corn and beans. Capacity for small grain will be less, and significantly less in small grain with a high percentage of dockage. It has 4,000 square inches of screen area and exposes 244,290 square inches per minute when run at recommended speeds. The overall length is 130 inches. It has a removable tow hitch.

DRIVE OPTIONS: May be powered by 3 HP electric motor (5 HP if used with the Swing-A-Way Hopper; add 1 HP for high moisture grain), hydraulic drive or direct to Feterl Auger PTO drive.

OPTIONAL HYDRAULIC DRIVE FOR MODELS 85 & 100. FLOW CONTROL REQUIRED.



OPTIONAL DIRECT TO FETERL AUGER PTO DRIVE FOR MODEL 85



There Is A Screen For Every Crop

	DESCRIPTION	APPLICATION		DESCRIPTION	APPLICATION
#1	4 x 4 Screen .225 In. Screen Opening	Shelled Corn Large Kernel	#4	6 x 6 Screen .147 In. Screen Opening	Soy Beans Edible Beans Sunflower Seeds
#1 ^{1/2}	4 x 4 Screen .218 In. Screen Opening	Shelled Corn Medium Kernel	#5	8 x 8 Screen .108 In. Screen Opening	Wheat - Barley Oats - Milo
#2	4 x 4 Screen .203 In. Screen Opening	Shelled Corn Small Kernel	#5 ^{1/2}	9 x 9 Screen .096 In. Screen Opening	Wheat
#3	5 x 5 Screen .177 In. Screen Opening	Soy Beans Edible Beans Sunflower Seeds	#6	10 x 10 Screen .085 In. Screen Opening	Wheat Barley Oats - Milo

Manufactured by:

Feterl
MFG. CO.

A United Dominion Company
Salem, South Dakota 57058

PHONE: (605) 425-2206 • FAX: (605) 425-2183
TOLL FREE: (800) 367-8660

Contact Us for Specific Information

FETERL RETAINS THE RIGHT TO CHANGE DESIGN WITHOUT BEING OBLIGATED TO CHANGE PREVIOUSLY SOLD UNITS.

Form RS 8-98