

# Feterl MFG. CO.

# Hoppers

## Get the "low down" from Feterl Mfg.

### 10" EASI-ROLL TRUCK HOPPER


Our Easi-Roll Truck Hopper is the answer for grain handlers who need a high-capacity, low-profile hopper. 16" diameter caster wheels lock for transport and/or use.

Specifications	10"
Hopper Dimensions:	52"Lx38"Wx9"H
Flighting:	Left Hand
Total Hopper Length:	190"
Discharge Height:	33"
Capacity: up to	7500 bph, 7-1/2 HP @ 650 rpm
Power Requirements:	
Hydraulic	18 GPM, 1800 PSI
Electric	7-1/2 to 10 HP

Shown here with hydraulic drive. Also available with electric drive.



An optional tow hitch allows the unit to be easily maneuvered. (Not to be used for road transportation purposes.)

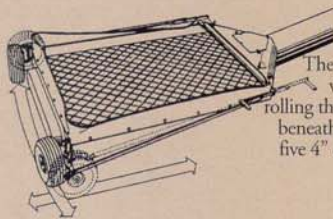


The 10-1/2" hopper wheels may be rotated 90° with the flip of a convenient lever for ease in rolling the hopper left or right, forward or backward, beneath the hauling vehicle. This hopper, featuring five 4" diameter hopper flights, is one of the lowest profile hoppers available.

### 8" & 10" INDEPENDENTLY POWERED HOPPERS



This low-profile hopper, designed with a special CV joint, creates a pivot point that enables the hopper tube to be elevated for different applications such as filling the feed grinder, feeding the grain leg or silage blower, or filling an auger.

Specifications	8"	10"
Hopper Dimensions	32"x42"x10-1/2"	32"x60"x10-1/2"
Capacity: up to	3500 bph	4800 bph
<b>POWER REQUIREMENTS</b>		
Hydraulic	15 GPM, 1500 PSI	15 GPM, 1800 PSI
Electric	3HP	5HP
Total Hopper Length	174"	190"

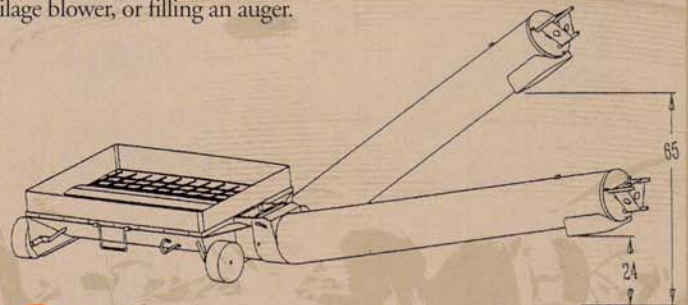

# Feterl MFG. CO.

411 Center Ave. West • P.O. Box 398 • Salem, SD 57058  
Phone (605) 425-2206 • Fax (605) 425-2183 • [www.feterl.com](http://www.feterl.com)  
Watts (800) 367-8660



# Feterl Hoppers... Quality Tried & True

*Eliminate the need for an expensive pit with a portable*

## Drive Over Hopper



*For center discharge, side discharge and end dump vehicles*

### 10" Discharge Tube - Dry Corn

Center Hopper - 4500 BPH, 600 RPM on flight  
Side Hopper - 3600 BPH  
Electric Drive Power Requirements - 7-1/2 HP

### 12" Discharge Tube - Dry Corn

Center Hopper - 6000 BPH, 600 RPM on flight  
Side Hopper - 4300 BPH  
Electric Drive Power Requirements - 10 HP

### Dimensions

Side Hopper - 30" x 48"  
Center Hopper - 48" x 48"  
Discharge Ht. - 30"  
Tube Length - 6'  
Overall Ht., hopper body - 10-1/4"  
Ramps - 30" wide, 10' long  
Weight - 4000 lb.



Side ramps fold up for transport with our user-friendly Ramp Lift System!

*Compact and portable!*

Removable transport wheels and tow hitch

Mesh Guards covering center and side hopper meet ASAE 361.3 requirements.



## 2 DRIVES AVAILABLE: HYDRAULIC OR ELECTRIC

CV Joint used for hopper incline provides smoother operation and long life.

# Feterl MFG. CO.

Salem, South Dakota 57058

PHONE: (605) 425-2206

FAX (605) 425-2183

TOLL FREE: (800) 367-8660

[www.feterl.com](http://www.feterl.com)

FORM HOP 4-01

FETERL RETAINS THE RIGHT TO CHANGE DESIGN WITHOUT BEING OBLIGATED TO CHANGE PREVIOUSLY SOLD UNITS